



PRODUCT SPECIFICATIONS


Ultra wall-mounted faucet GW20, IR-sensor, no temp. mixing, solar, chrome

Dimension: 141mm


- operating pressure: 0,3 - 10 bar
- flow rate: approx. 5,7 l/min. (3 bar) controlled - optional 2 l/min (cost neutral)
- max. water temperature: 80° C
- aerator: aerator RC
- flexible hose: 35 cm
- connection thread: G 1/2"

filter: 0,5 mm mesh size

- sensor sensitivity: automatic self-adapting sensor technology
- follow-up time: 1 sec. pre-set (adjustable with touch 0 - 10 sec.)
- continuous water flow and hygienic rinse time: 2 min. pre-set (adjustable with touch 0,5 - 20 min.)
- temporary-off: 2 min. (fixed)
- engineering standards: DIN EN 200; CE

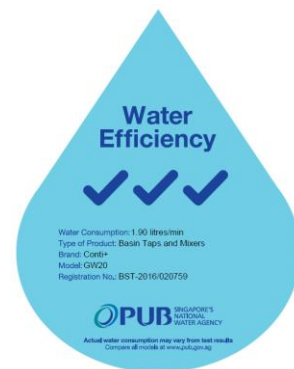

TECHNICAL SPECIFICATIONS

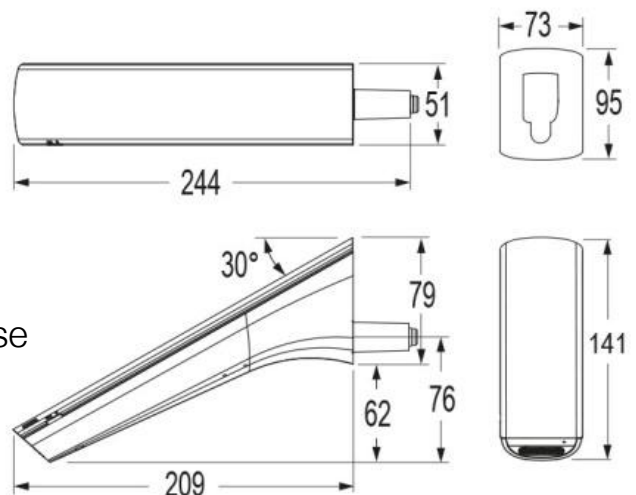

Unit in millimetres.